
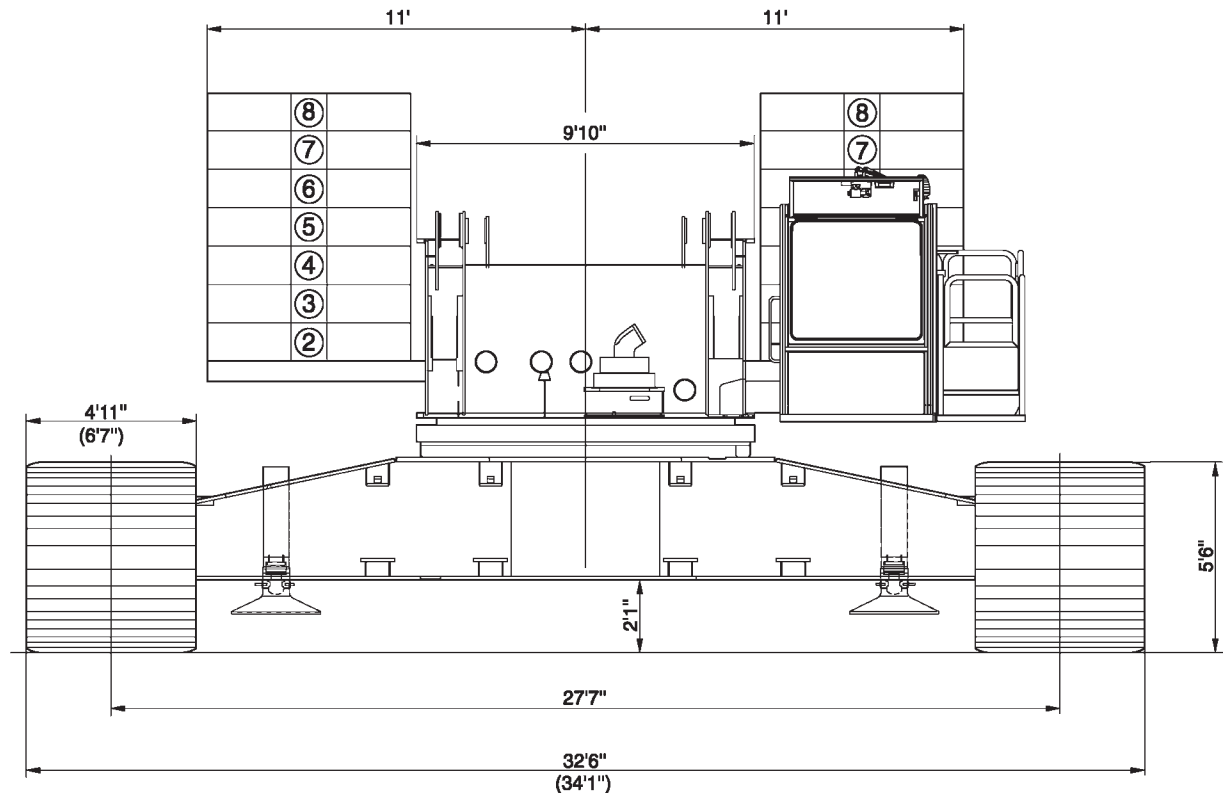


660 t Crawler Crane

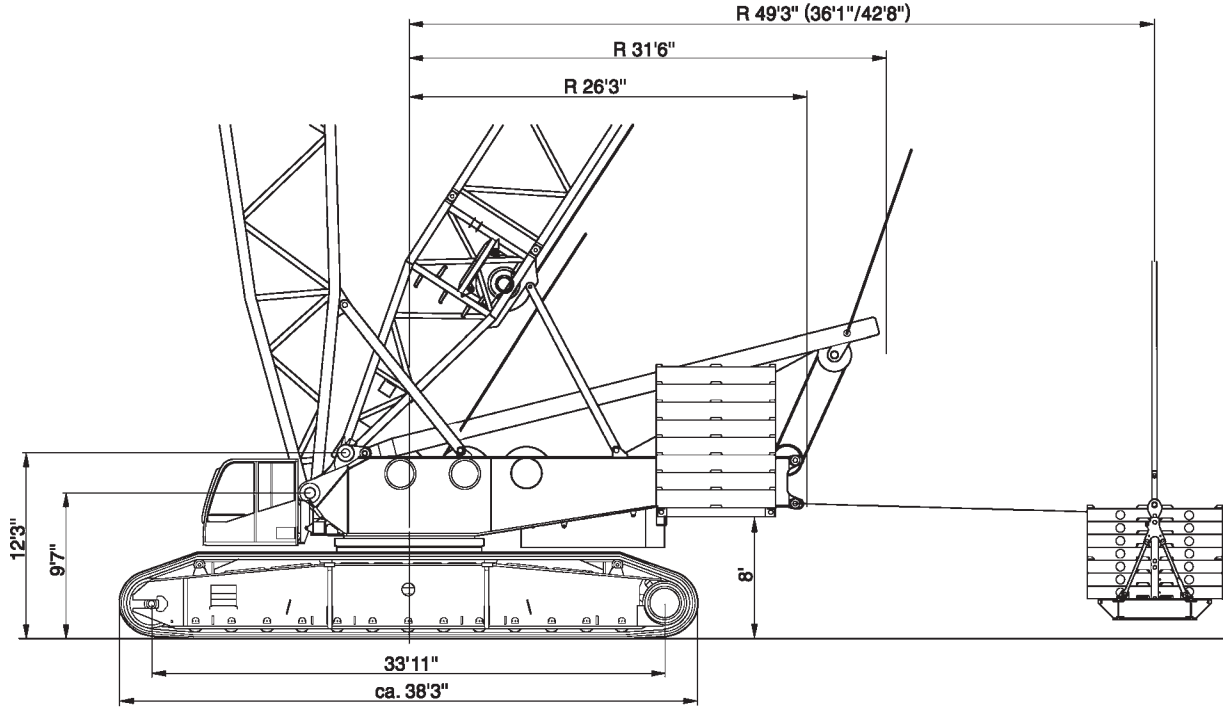

All information given are for reference only.

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment


Aerial Lifts

Transportation



General Information
Hydraulic Truck Cranes
Crawler Cranes
Carry Decks
Rough Terrain Cranes
Rigging Equipment
Aerial Lifts
Transportation

SUPERLIFT CONFIGURATIONS

STANDARD-SL ↗ 36.1 ft, 42.7 ft, 49.2 ft

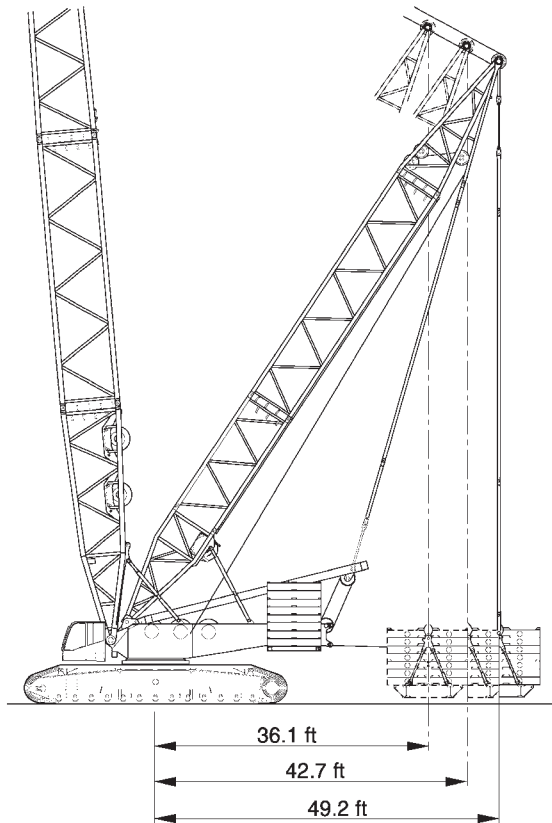


TELE-SL ↗ 42.7 ft – 55.8 ft

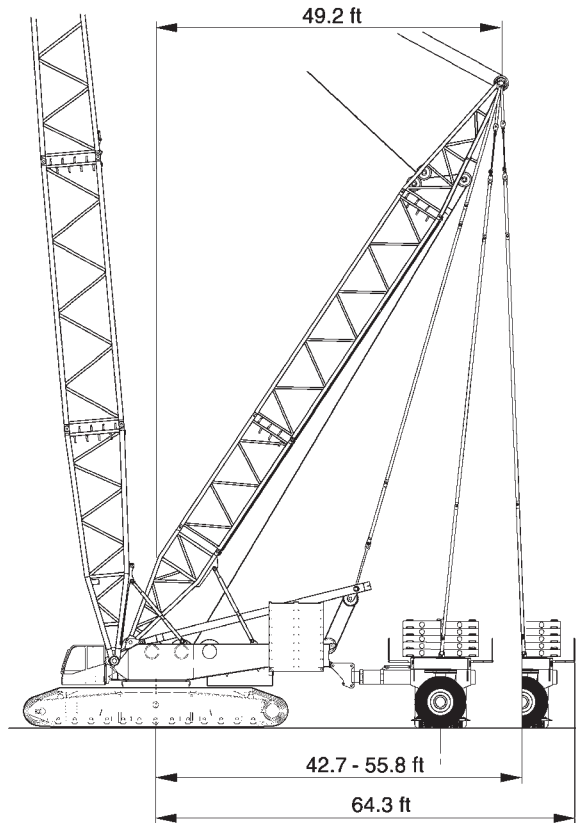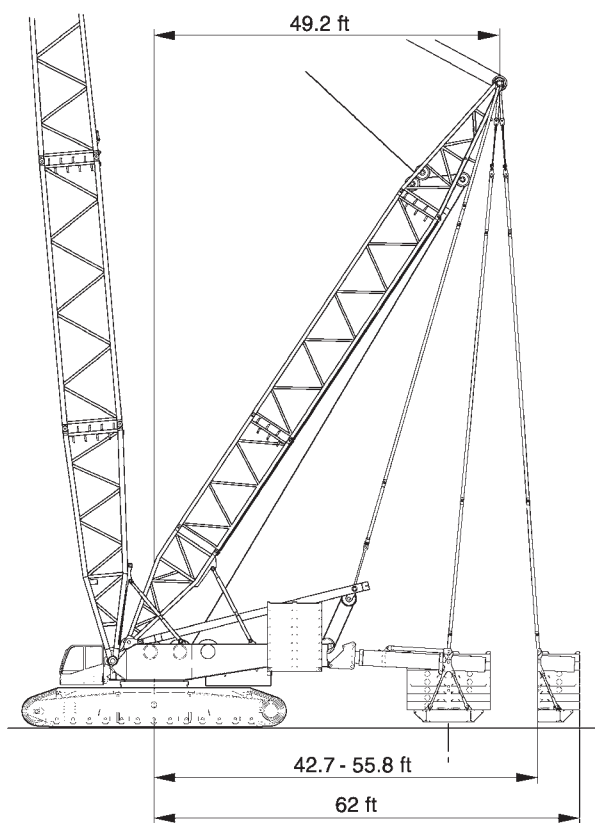

All information given are for reference only.

All information given are for reference only.

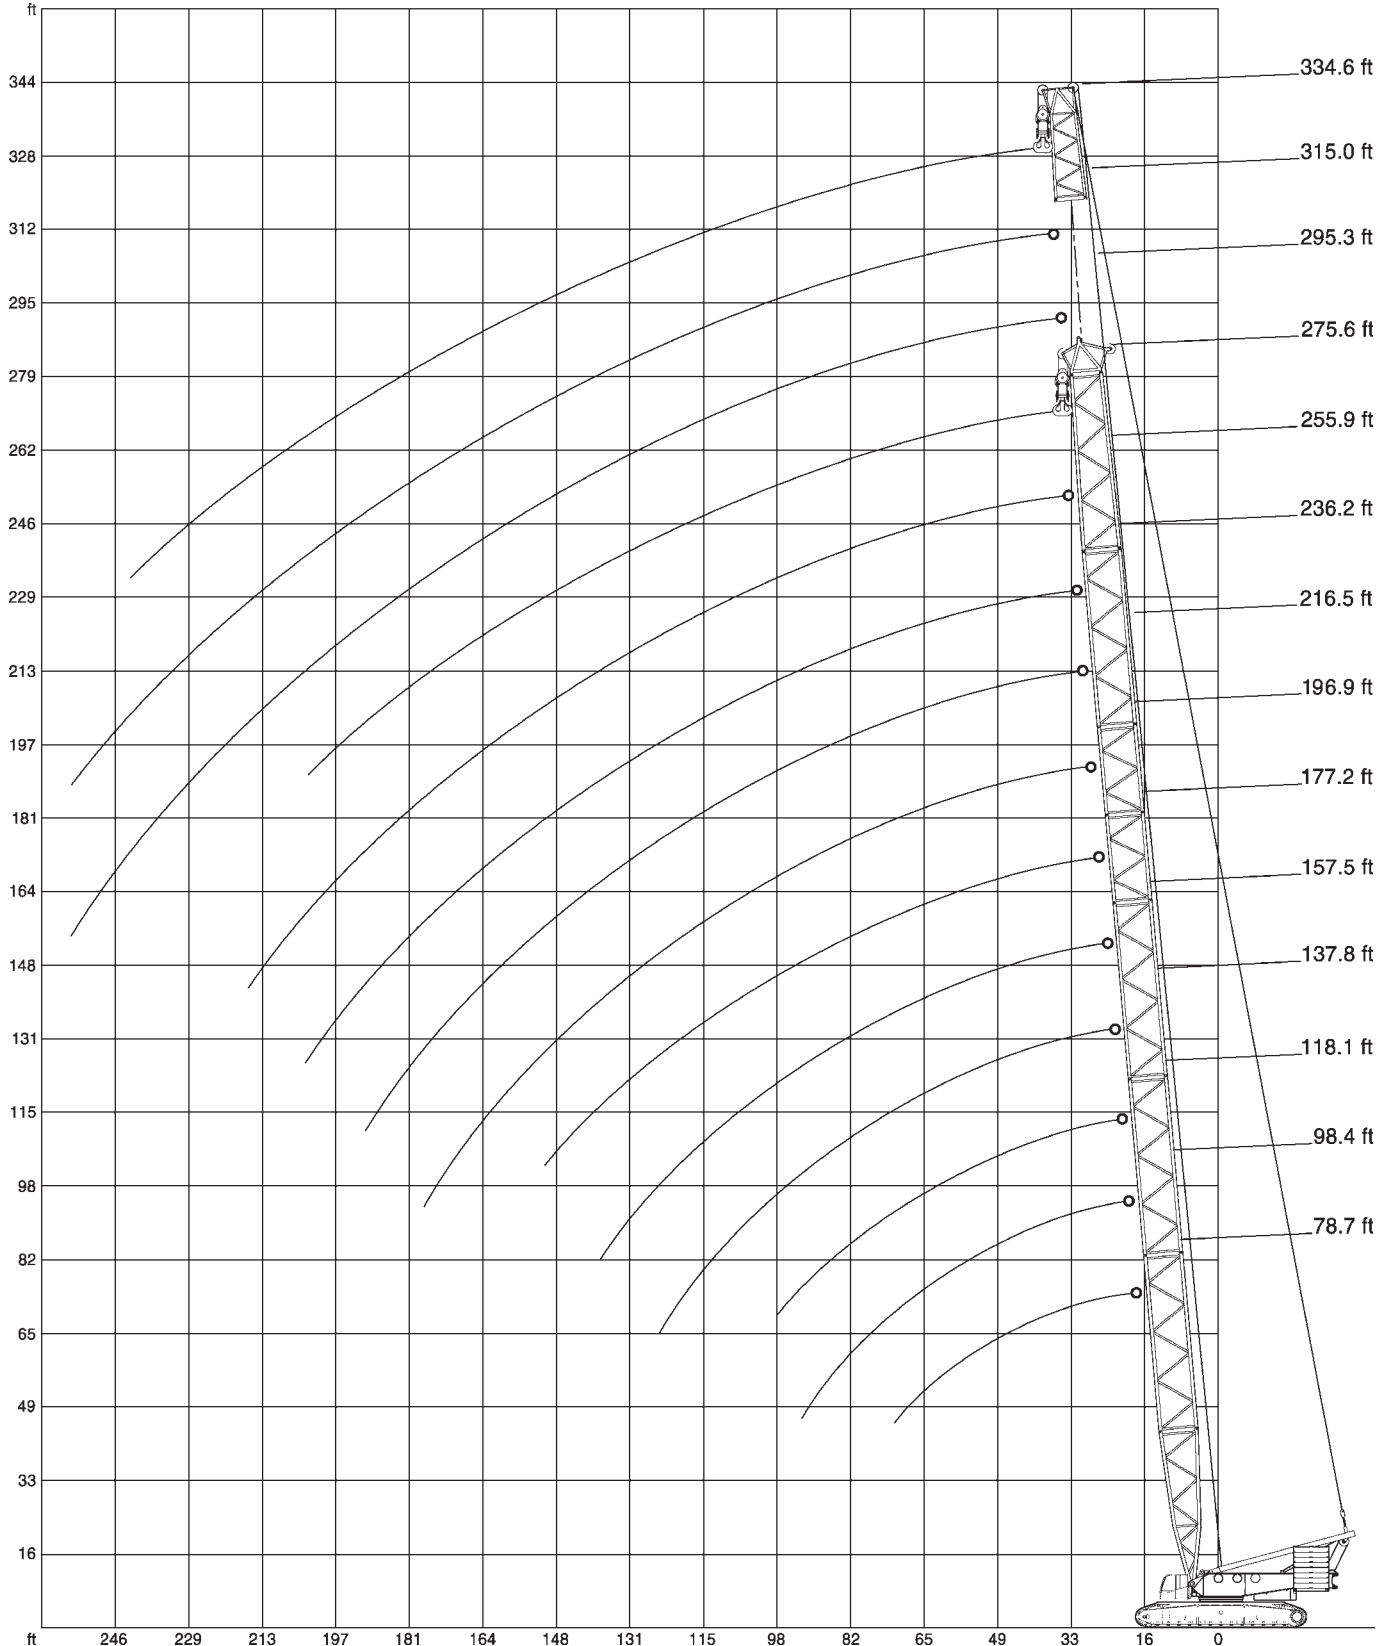

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



78.7-275.6 ft
SH



396,800 lbs



27'6"



360°

75

75%


ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2*	255.9*	275.6**	ft
19.7	1322.8											19.7
23	1236.8	1221.4	1250									23
26.2	1115.5	1106.7	1100.1	1093.5	1089.1							26.2
29.5	903.9	899.5	897.3	895.1	892.9	890.7	890.7					29.5
32.8	743	738.5	736.3	731.9	729.7	727.5	727.5	725.3	663.6			32.8
39.4	544.5	540.1	535.7	531.3	529.1	526.9	526.9	524.7	522.5	520.3	467.4	39.4
45.9	425.5	421.1	418.9	414.5	410.1	407.9	407.9	405.7	403.4	401.2	399	45.9
52.5	348.3	343.9	339.5	335.1	332.9	330.7	328.5	326.3	324.1	324.1	319.7	52.5
59.1	293.2	288.8	284.4	280	277.8	275.6	273.4	271.2	269	266.8	264.6	59.1
65.6	253.5	249.1	244.7	240.3	235.9	233.7	231.5	229.3	227.1	224.9	222.7	65.6
72.2	222.7	217.2	212.7	208.3	205	201.7	199.5	197.3	195.1	194	189.6	72.2
78.7		192.9	187.4	183	179.7	176.4	174.2	172	169.8	167.6	164.2	78.7
85.3		172	167.6	162	158.7	155.4	153.2	151	148.8	146.6	143.3	85.3
91.9		155.4	149.9	145.5	141.1	138.9	135.6	133.4	131.2	129	125.7	91.9
98.4			136.7	131.2	126.8	124.6	121.3	119	116.8	114.6	110.2	98.4
111.5				109.1	104.7	101.6	98.8	96.1	93.5	90.8	86.2	111.5
124.7				92.8	88	84.4	80.9	77.6	74.5	71.9	67.2	124.7
137.8					75.2	70.3	66.6	63.3	60	57.1	52.5	137.8
150.9						59.5	55.3	51.6	48.3	45.4	40.6	150.9
164							46.3	42.5	38.8	35.7	30.9	164
177.2							39.2	35.1	31.1	27.8	22.9	177.2
190.3								29.1	24.7	21.4	16.3	190.3
203.4									19.6	15.9		203.4
216.5										11.5		216.5

with 132,300 lbs central ballast

* idler wheel supported

** with additional side jack

All information given are for reference only.


 78.7-275.6 ft
 SH


 352,700 lbs


 27'6"


 360°

75
 75%

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2*	255.9*	275.6**	ft
23	934.8	1029.6	1119.9									23
26.2	892.9	950.2	948	943.6	943.6							26.2
29.5	747.4	743	740.8	738.5	736.3	734.1	734.1					29.5
32.8	612.9	608.5	606.3	601.9	599.7	597.5	597.5	595.2	590.8			32.8
39.4	447.5	443.1	438.7	436.5	432.1	432.1	429.9	427.7	425.5	425.5	421.1	39.4
45.9	350.5	346.1	341.7	337.3	335.1	332.9	330.7	328.5	326.3	326.3	321.9	45.9
52.5	284.4	280	275.6	273.4	269	266.8	264.6	262.4	260.1	260.1	255.7	52.5
59.1	240.3	235.9	231.5	227.1	222.7	220.5	219.4	217.2	215	212.7	209.4	59.1
65.6	206.1	201.7	197.3	192.9	189.6	186.3	184.1	181.9	180.8	178.6	175.3	65.6
72.2	180.8	175.3	170.9	166.4	162	159.8	157.6	155.4	153.2	151	147.7	72.2
78.7		154.3	149.9	144.4	141.1	138.9	136.7	134.5	132.3	130.1	125.7	78.7
85.3		137.8	132.3	127.9	124.6	121.3	119	116.8	114.6	112.4	108.9	85.3
91.9		124.6	119	113.5	110.2	107.4	104.9	102.5	100.3	97.9	93.5	91.9
98.4			107.6	102.3	98.3	95.5	92.8	89.9	87.3	84.9	80.2	98.4
111.5				84	79.6	75.8	72.5	69.4	66.6	63.9	59.5	111.5
124.7				70.5	65	60.8	57.1	54	50.9	48.3	43.7	124.7
137.8					54	49.4	45.4	42.1	38.8	35.9	31.3	137.8
150.9						40.6	36.2	32.6	29.1	26.2	21.4	150.9
164							28.9	24.9	21.4	18.3	13.4	164
177.2							23.4	19	15	11.7		177.2
190.3								14.3				190.3

* idler wheel supported
 ** with additional side jack

All information given are for reference only.

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



216,5-334,6 ft
SH/LH



396,800 lbs



27'6"



360°

75

75%

ft	216.5	236.2	255.9	275.6	295.3*	315**	334.6**	ft
29.5	657							29.5
32.8	657	549	445.3					32.8
36.1	597.5	543.4	445.3					36.1
39.4	537.9	537.9	445.3	372.6	339.5	302		39.4
45.9	418.9	418.9	383.6	330.7	339.5	302	238.1	45.9
52.5	339.5	339.5	337.3	293.2	313.1	280	218.3	52.5
59.1	284.4	284.4	284.4	262.4	280	260.1	200.6	59.1
65.6	242.5	242.5	242.5	235.9	238.1	238.1	185.2	65.6
72.2	211.6	210.5	209.4	208.3	207.2	205	172	72.2
78.7	185.2	185.2	184.1	181.9	180.8	179.7	158.7	78.7
85.3	164.2	163.1	163.1	160.9	159.8	158.7	149.9	85.3
91.9	146.6	146.6	145.5	143.3	142.2	141.1	140	91.9
98.4	132.3	131.2	130.1	129	126.8	125.7	124.6	98.4
111.5	109.1	108.2	107.4	105.4	104.1	102.7	101.6	111.5
124.7	91.5	90.4	89.3	87.3	86	84.7	83.3	124.7
137.8	77.4	76.3	75.2	72.8	71.2	69.4	68.1	137.8
150.9	65.9	64.6	63.3	60.6	59.1	57.3	56	150.9
164	56.2	54.7	53.4	50.7	48.9	47.2	45.9	164
177.2	48.3	46.7	45.2	42.5	40.8	39	37.5	177.2
190.3	41.7	39.9	38.4	35.5	33.7	32	30.4	190.3
203.4		34.2	32.4	29.8	27.8	25.8	24.5	203.4
216.5			27.6	24.7	22.7	20.7	19.2	216.5
229.7			23.4	20.3	18.3	16.1	14.6	229.7
232.9					17.3	15.1	13.6	232.9
242.8					14.3	12.1	10.6	242.8
255.9					11	8.8		255.9

with 132,300 lbs central ballast

* idler wheel supported

** with additional side jack

All information given are for reference only.


 216,5-334,6 ft
 SH/LH


 352,700 lbs


 27'6"


 360°

75
 75%

ft	216.5	236.2	255.9	275.6	295.3*	315**	334.6**	ft
29.5	657							29.5
32.8	608.5	549	445.3					32.8
36.1	524.7	494.9	443.1					36.1
39.4	440.9	440.9	440.9	372.6	339.5	302		39.4
45.9	341.7	341.7	341.7	330.7	339.5	302	238.1	45.9
52.5	277.8	275.6	275.6	273.4	273.4	271.2	218.3	52.5
59.1	229.3	229.3	229.3	227.1	227.1	224.9	200.6	59.1
65.6	196.2	195.1	195.1	192.9	191.8	190.7	185.2	65.6
72.2	168.7	168.7	167.6	165.3	164.2	163.1	162	72.2
78.7	147.7	146.6	145.5	144.4	143.3	141.1	141.1	78.7
85.3	130.1	129	127.9	126.8	125.7	123.5	123.5	85.3
91.9	115.7	114.6	113.5	111.3	110.2	109.8	108.7	91.9
98.4	103.6	102.7	101.9	99.9	98.5	97.2	96.3	98.4
111.5	84	83.1	82.2	80	78.5	76.9	75.8	111.5
124.7	69	67.9	66.6	64.2	62.6	60.8	59.7	124.7
137.8	56.7	55.3	54.2	51.6	50	48.3	47.2	137.8
150.9	46.7	45.4	44.1	41.4	39.9	38.1	36.8	150.9
164	38.8	37.3	35.9	33.3	31.5	29.8	28.4	164
177.2	32.2	30.6	29.1	26.5	24.7	22.9	21.6	177.2
190.3	26.9	24.9	23.4	20.7	19	17	15.7	190.3
203.4		20.3	18.5	15.9	13.9	11.9	10.6	203.4
216.5			14.6	11.7	9.7			216.5
229.7			11.2					229.7

* idler wheel supported

** with additional side jack

All information given are for reference only.

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



255.9-354.3 ft
SGLmax.



396,800 lbs



27'6"



360°

75

75%

ft	255.9	275.6**	295.3**	315**	334.6**	354.3**	ft
32.8	489.4						32.8
36.1	479.5	474					36.1
39.4	469.6	454.2	438.7	350.5			39.4
45.9	392.4	381.4	368.2	350.5	319.7	288.8	45.9
52.5	337.3	326.3	315.3	306.4	297.6	288.8	52.5
59.1	282.2	277.8	275.6	266.8	257.9	251.3	59.1
65.6	240.3	235.9	233.7	233.7	227.1	220.5	65.6
72.2	207.2	205	201.7	200.6	198.4	195.1	72.2
78.7	181.9	178.6	176.4	175.3	173.1	169.8	78.7
85.3	159.8	157.6	155.4	153.2	151	147.7	85.3
91.9	143.3	140	137.8	135.6	133.4	130.1	91.9
98.4	127.9	124.6	122.4	121.3	119	115.7	98.4
111.5	104.7	101.9	99	97.7	95	91.1	111.5
124.7	86.6	83.6	80.2	78.7	75.6	71.7	124.7
137.8	72.1	68.6	65.3	63.5	60.4	56.4	137.8
150.9	60	56.4	52.9	51.4	48.1	44.1	150.9
164	50	46.5	43	41.2	37.9	34	164
177.2	41.9	38.1	34.6	32.8	29.5	25.6	177.2
190.3	34.8	31.3	27.6	25.8	22.5	18.3	190.3
203.4	29.1	25.4	21.6	19.6	16.3	12.1	203.4
216.5	24	20.3	16.5	14.6	11		216.5
229.7	19.8	15.9	11.9	9.9			229.7
232.9			10.9	8.8			232.9


with 132,300 lbs central ballast

** with additional side jack

For SH/LH SGLmax. a boom power-kit is required

All information given are for reference only.

All information given are for reference only.

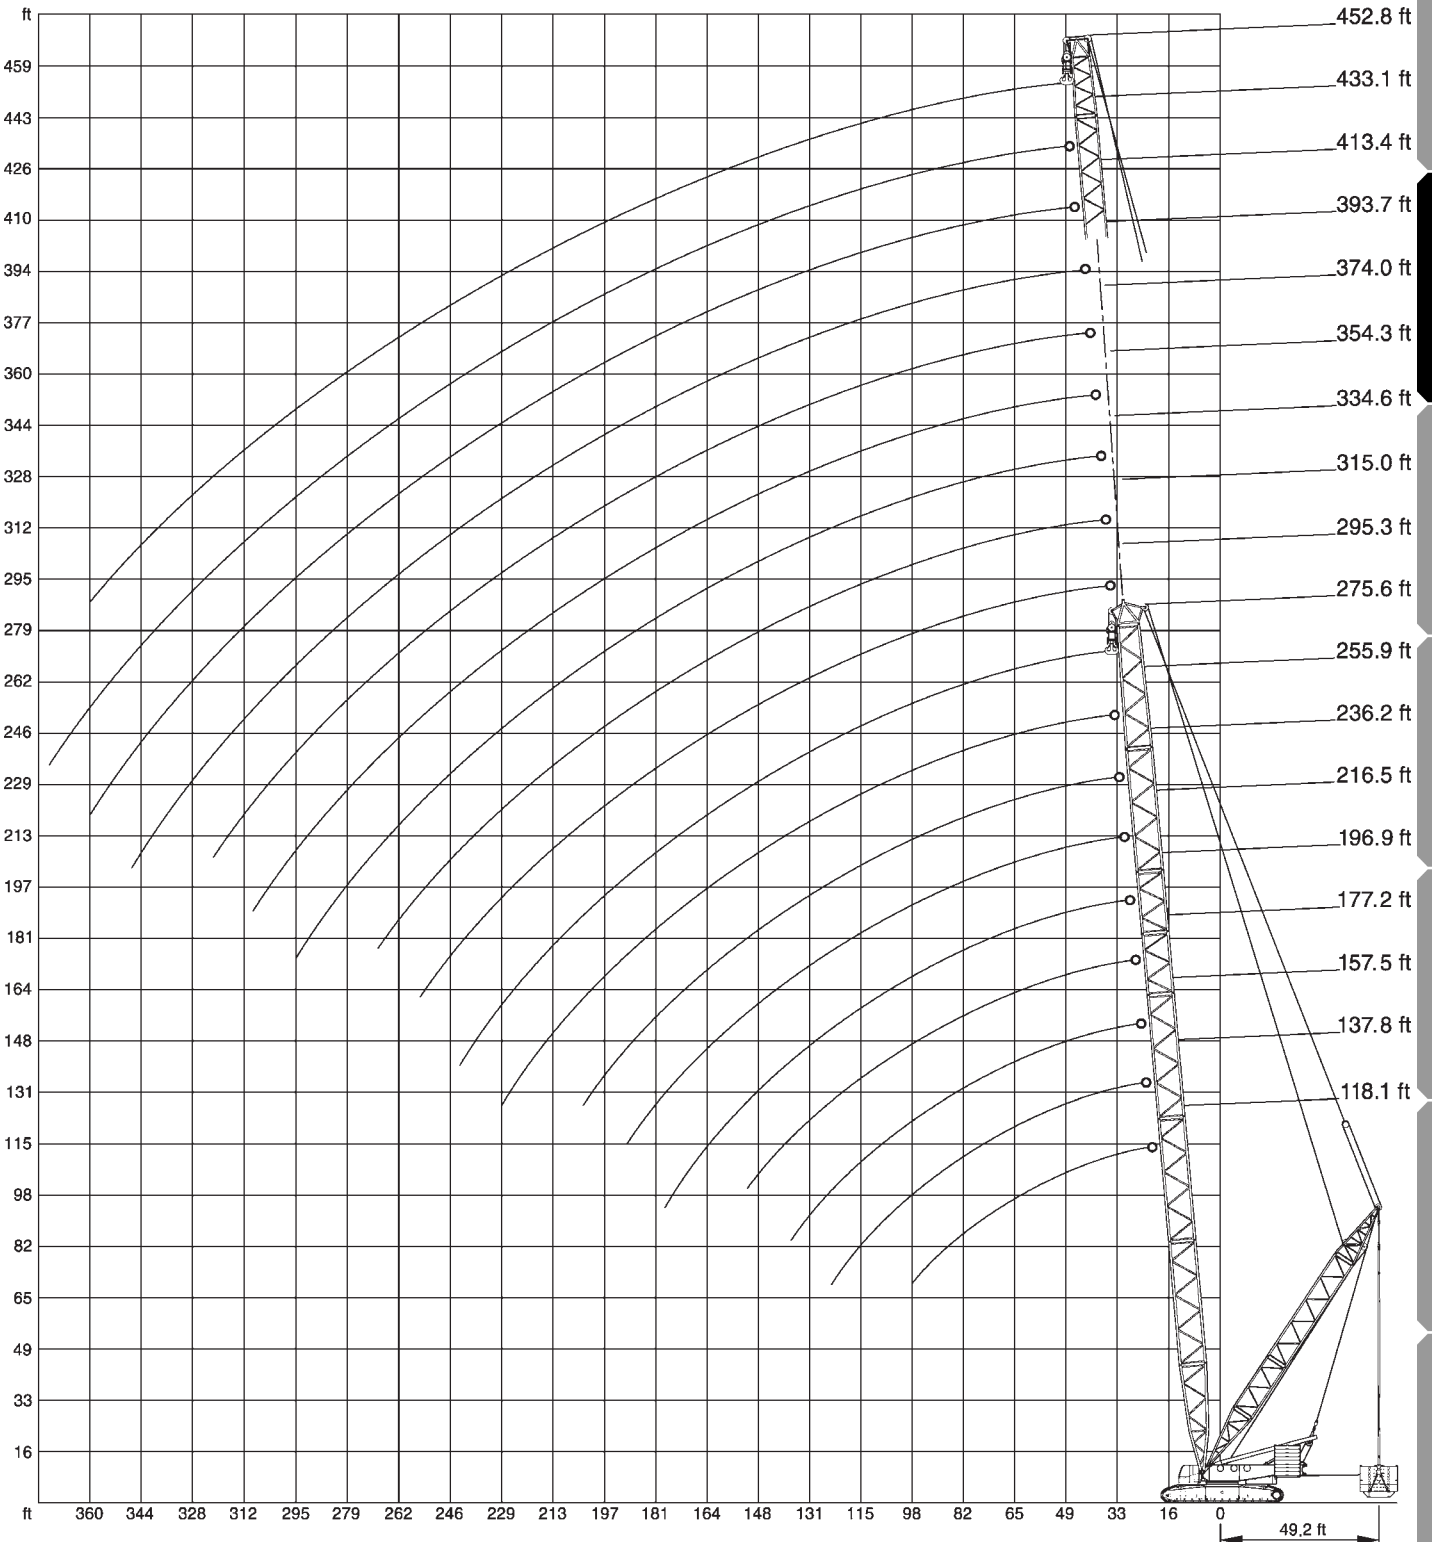

General Information
 Hydraulic Truck Cranes
Crawler Cranes
 Carry Decks
 Rough Terrain Cranes
 Rigging Equipment
 Aerial Lifts
 Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

						75
118.1-275.6 ft SSL	98.4 ft	396,800 lbs	0-661,400 lbs 36.1-49.2 ft	27'6"	360°	75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	ft
23	1322.8									19.7
26.2	1322.8	1307.3	1278.7							23
29.5	1322.8	1307.3	1278.7	1157.4	1049.4					26.2
32.8	1320.6	1307.3	1278.7	1157.4	1049.4	912.7	822.3			29.5
39.4	1285.3	1265.5	1278.7	1157.4	1049.4	912.7	822.3	696.7	619.5	32.8
45.9	1144.2	1137.6	1133.2	1128.8	1049.4	912.7	822.3	696.7	619.5	39.4
52.5	1000.9	994.3	989.9	987.7	983.3	901.7	822.3	696.7	619.5	45.9
59.1	888.5	884.1	879.6	875.2	870.8	855.4	798.1	694.5	619.5	52.5
65.6	800.3	793.7	789.3	784.8	780.4	778.2	760.6	674.6	612.9	59.1
72.2	712.1	718.7	714.3	709.9	707.7	703.3	701.1	657	597.5	65.6
78.7	626.1	648.2	646	646	643.8	641.5	637.1	634.9	584.2	72.2
85.3	553.4	593	588.6	586.4	584.2	584.2	582	582	571	78.7
91.9	502.7	540.1	537.9	537.9	535.7	533.5	533.5	531.3	529.1	85.3
98.4	447.5	485	498.2	493.8	493.8	491.6	487.2	487.2	482.8	91.9
111.5		396.8	425.5	423.3	421.1	416.7	414.5	412.3	410.1	98.4
124.7		328.5	354.9	368.2	363.8	361.6	359.4	357.1	352.7	111.5
137.8			302	321.9	321.9	317.5	315.3	313.1	308.6	124.7
150.9				271.2	286.6	284.4	280	277.8	273.4	137.8
164					249.1	253.5	251.3	249.1	244.7	150.9
177.2					215	227.1	227.1	224.9	220.5	164
190.3						197.3	207.2	205	200.6	177.2
203.4							181.9	187.4	183	190.3
216.5								166.4	167.6	203.4
229.7								145.5	149.9	216.5
242.8									132.3	229.7

with 132,300 lbs central ballast

All information given are for reference only.

 118.1-275.6 ft SSL	 98.4 ft	 396,800 lbs	 0-661,400 lbs 55.8 ft	 27'6"	 360°	75 75%
--	--	--	---	---	---	------------------

ft	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	ft
23	1322.8									19.7
26.2	1322.8	1307.3	1278.7							23
29.5	1322.8	1307.3	1278.7	1157.4	1049.4					26.2
32.8	1320.6	1307.3	1278.7	1157.4	1049.4	912.7	822.3			29.5
39.4	1285.3	1265.5	1278.7	1157.4	1049.4	912.7	822.3	696.7	619.5	32.8
45.9	1210.3	1177.3	1172.9	1157.4	1049.4	912.7	822.3	696.7	619.5	39.4
52.5	1062.6	1056	1051.6	1047.2	1036.2	901.7	822.3	696.7	619.5	45.9
59.1	943.6	939.2	932.6	930.4	925.9	855.4	798.1	694.5	619.5	52.5
65.6	817.9	842.2	837.8	833.3	831.1	809.1	760.6	674.6	612.9	59.1
72.2	712.1	760.6	760.6	756.2	751.8	749.6	723.1	657	597.5	65.6
78.7	626.1	672.4	694.5	690	685.6	683.4	676.8	639.3	584.2	72.2
85.3	553.4	601.9	626.1	630.5	628.3	626.1	615.1	601.9	571	78.7
91.9	489.4	540.1	564.4	577.6	575.4	571	564.4	551.2	531.3	85.3
98.4	432.1	485	515.9	526.9	529.1	524.7	518.1	509.3	491.6	91.9
111.5		392.4	427.7	445.3	449.7	449.7	445.3	438.7	423.3	98.4
124.7		315.3	354.9	377	388	388	388	381.4	370.4	111.5
137.8			293.2	321.9	335.1	341.7	339.5	337.3	326.3	124.7
150.9				271.2	288.8	297.6	302	299.8	291	137.8
164					249.1	260.1	266.8	266.8	262.4	150.9
177.2					212.7	227.1	235.9	238.1	233.7	164
190.3						197.3	208.3	212.7	210.5	177.2
203.4							181.9	188.5	188.5	190.3
216.5								166.4	168.7	203.4
229.7								145.5	149.9	216.5
242.8									132.3	229.7

with 132,300 lbs central ballast

All information given are for reference only.






General Information
Hydraulic Truck Cranes
Crawler Cranes
Carry Decks
Rough Terrain Cranes
Rigging Equipment
Aerial Lifts
Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

						75
177.2-354.3 ft HSSL	98.4 ft	396,800 lbs	0-661,400 lbs 36.1-49.2 ft	27'6"	360°	75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	177.2	196.9	216.5	236.2	255.9	275.6	295.3	315	334.6	354.3	ft
29.5	1157.4	1049.4									29.5
32.8	1157.4	1049.4	928.1	866.4							32.8
39.4	1157.4	1049.4	928.1	866.4	802.5	676.8	637.1	560			39.4
45.9	1126.6	1049.4	928.1	866.4	802.5	676.8	634.9	557.8	480.6	421.1	45.9
52.5	983.3	978.9	928.1	866.4	802.5	676.8	632.7	551.2	474	416.7	52.5
59.1	873	868.6	864.2	859.8	802.5	676.8	630.5	546.7	467.4	412.3	59.1
65.6	782.6	778.2	773.8	769.4	767.2	676.8	628.3	542.3	463	405.7	65.6
72.2	707.7	703.3	698.9	696.7	692.3	672.4	604.1	533.5	458.6	401.2	72.2
78.7	643.8	641.5	637.1	632.7	630.5	626.1	582	520.3	447.5	394.6	78.7
85.3	584.2	584.2	579.8	579.8	577.6	573.2	560	509.3	436.5	383.6	85.3
91.9	535.7	533.5	531.3	529.1	529.1	524.7	522.5	498.2	425.5	374.8	91.9
98.4	493.8	491.6	487.2	485	485	480.6	478.4	469.6	414.5	363.8	98.4
111.5	426.2	422.6	419.6	417.4	415.9	411.5	410.8	404.9	382.1	343.2	111.5
124.7	366.7	365.2	362.3	360.1	357.9	353.5	353.5	349.1	343.9	318.9	124.7
137.8	315.3	319.7	315.3	313.1	310.9	306.4	306.4	302	299.8	291	137.8
150.9	268.2	282.9	282.9	279.3	277	272.6	272.6	268.2	266	260.1	150.9
164		245.4	252.1	249.9	247.7	243.2	242.9	238.5	236.6	232.6	164
177.2		213.8	222.7	224.9	222.7	218.3	217.2	212.7	211.6	208.3	177.2
190.3			191.8	200.6	202.8	198.4	197.3	192.5	191.4	187.4	190.3
203.4				175.7	182.2	180.6	178.6	174.9	173.8	169.4	203.4
216.5					160.9	163.1	163.1	158.7	157.6	153.2	216.5
229.7					142.2	144.8	147.7	144.8	144.4	140	229.7
242.8						126.8	132.3	130.8	131.5	127.9	242.8
246.1						123.5	128.4	127.3	128.4	124.6	246.1
255.9							116.8	116.8	119	114.6	255.9
262.5							110.2	109.2	112.9	109.1	262.5
269								102.8	106.7	103.6	269
278.9								94.8	97.6	95.5	278.9
282.2									94.7	92.8	282.2
295.3									84.2	82.2	295.3
298.6									82.7	79.6	298.6
308.4										72.8	308.4
315										69.7	315

with 132,800 lbs central ballast
For HSSL a boom power-kit is required

All information given are for reference only.



295.3-452.8 ft
SSL/LSL



98.4 ft



396,800 lbs



0-661,400 lbs
36.1-49.2 ft



27'6"



360°

75

75%

All information given are for reference only.

ft	295.3	315	334.6	354.3	374	393.7	413.4	433.1	452.8	ft
39.4	546.7	474								39.4
45.9	546.7	471.8	399	337.3	295.4	269				45.9
52.5	546.7	469.6	394.6	330.7	291	266.8	240.3	211.6	180.8	52.5
59.1	546.7	467.4	392.4	324.1	288.8	264.6	238.1	209.4	176.4	59.1
65.6	542.3	465.2	388	319.7	284.4	260.1	238.1	207.2	174.2	65.6
72.2	531.3	460.8	383.6	313.1	280	257.9	235.9	205	172	72.2
78.7	518.1	451.9	379.2	306.4	277.8	253.5	233.7	202.8	169.8	78.7
85.3	507.1	445.3	374.8	299.8	273.4	251.3	231.5	200.6	165.3	85.3
91.9	493.8	438.7	370.4	293.2	269	246.9	229.3	198.4	163.1	91.9
98.4	467.4	427.7	366	286.6	264.6	244.7	227.1	196.2	160.9	98.4
111.5	421.1	392.4	343.9	273.4	257.9	235.9	222.7	191.8	156.5	111.5
124.7	366	359.4	319.7	262.4	249.1	229.3	218.3	189.6	149.9	124.7
137.8	321.9	319.7	295.4	251.3	238.1	220.5	213.8	187.4	145.5	137.8
150.9	284.4	284.4	273.4	238.1	229.3	213.8	207.2	183	138.9	150.9
164	255.7	253.5	251.3	227.1	218.3	205	200.6	180.8	134.5	164
177.2	231.5	229.3	229.3	216.1	209.4	198.4	194	176.4	127.9	177.2
190.3	210.5	209.4	208.3	205	200.6	189.6	187.4	172	121.3	190.3
203.4	192.9	191.8	190.7	188.5	187.4	180.8	180.8	165.3	114.6	203.4
216.5	177.5	176.4	174.2	173.1	172	170.9	169.8	160.9	108	216.5
229.7	163.1	162	160.9	158.7	157.6	157.6	156.5	153.2	101.4	229.7
242.8	151	149.9	148.8	146.6	145.5	145.5	144.4	142.2	92.6	242.8
255.9	134.5	138.9	137.8	135.6	134.5	134.5	133.4	131.2	86	255.9
269		124.6	127.9	126.8	125.7	124.6	123.5	121.3	79.4	269
282.2			115.7	116.8	116.8	115.7	114.6	112.4	74.7	282.2
295.3			104.1	105.8	107.6	108.2	107.4	104.7	72.5	295.3
308.4				95	97.7	99.2	99.2	96.3	70.3	308.4
315					92.9	94.8	91.1	88.6	68.1	315
334.6						81.8	83.1	81.4	65.7	334.6
347.8						73.4	75.4	74.1	63.5	347.8
360.9							67.7	67	61.3	360.9
364.2								65.3	60.7	364.2
374								60.2	59.1	374
380.6									56.4	380.6
387.1									53.8	387.1
400.3									48.5	400.3

with 132,300 lbs central ballast

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

						75
295.3-452.8 ft SGLmax.	98.4 ft	396,800 lbs	0-661,400 lbs 36.1-49.2 ft	27'6"	360°	75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts


Transportation

ft	295.3	315	334.6	354.3	374	393.7	413.4	433.1	452.8	ft
39.4	551.2	496								39.4
45.9	551.2	491.6	447.5	403.4	357.1	321.9				45.9
52.5	551.2	485	438.7	399	354.9	321.9	284.4	257.9	227.1	52.5
59.1	551.2	478.4	432.1	396.8	352.7	319.7	282.2	255.7	224.9	59.1
65.6	549	474	425.5	394.6	350.5	317.5	280	253.5	222.7	65.6
72.2	531.3	463	418.9	394.6	348.3	315.3	277.8	251.3	220.5	72.2
78.7	520.3	451.9	407.9	390.2	346.1	313.1	275.6	249.1	218.3	78.7
85.3	507.1	440.9	396.8	383.6	341.7	310.9	273.4	246.9	216.1	85.3
91.9	493.8	429.9	385.8	374.8	339.5	308.6	273.4	244.7	213.8	91.9
98.4	451.9	414.5	374.8	366	335.1	304.2	271.2	242.5	210.5	98.4
111.5	388.7	374.8	346.9	338	321.9	298.4	266.8	238.1	206.1	111.5
124.7	335.8	333.6	318.2	313.8	304.2	284.4	258.7	232.4	201.7	124.7
137.8	293.2	291	288.8	284.4	282.2	266.8	246.9	224.9	196.2	137.8
150.9	260.9	258.7	256.5	252.1	249.9	243.2	232.2	213.8	188.1	150.9
164	233	231.1	228.5	224.5	221.8	219	215	201.4	180	164
177.2	209.4	208.3	205	201.7	198.4	196.2	192.9	189.6	172	177.2
190.3	191.1	190	186.3	182.3	180	177.1	174.5	171.2	163.1	190.3
203.4	174.2	173.1	170.1	165.7	163.1	160.2	157.6	154.1	149.9	203.4
216.5	159.8	157.6	155.4	151	147.7	145.5	142.2	138.9	135.6	216.5
229.7	147.3	145.9	142.9	138.5	136	132.3	129.6	126.4	122.4	229.7
242.8	136.3	134.8	131.5	127.3	124.3	121.6	118.4	114.8	110.5	242.8
255.9	126.8	124.6	121.3	116.8	114.6	111.3	108.2	104.1	100.1	255.9
269		115.7	112.1	108.6	105.8	102.1	98.8	94.5	90.7	269
282.2			102.7	100.8	97.4	93.5	89.9	86.1	82	282.2
295.3			93.7	93.3	89.5	85.8	82.2	78	74.1	295.3
308.4				86.3	82.7	78.9	75.3	71.1	67.2	308.4
315				82.9	79.4	75.4	68.9	64.7	60.7	315
334.6						66.6	63.1	58.9	54.7	334.6
347.8						60.4	57.8	53.6	49.4	347.8
360.9							51.9	48.4	44.5	360.9
364.2							50.3	47.1	43.3	364.2
374								43.2	39.9	374
380.6								39.7	37.3	380.6
387.1									34.3	387.1
400.3									28	400.3

with 132,300 lbs central ballast
For SSL/LSL SGLmax. a boom power-kit is required

All information given are for reference only.

All information given are for reference only.

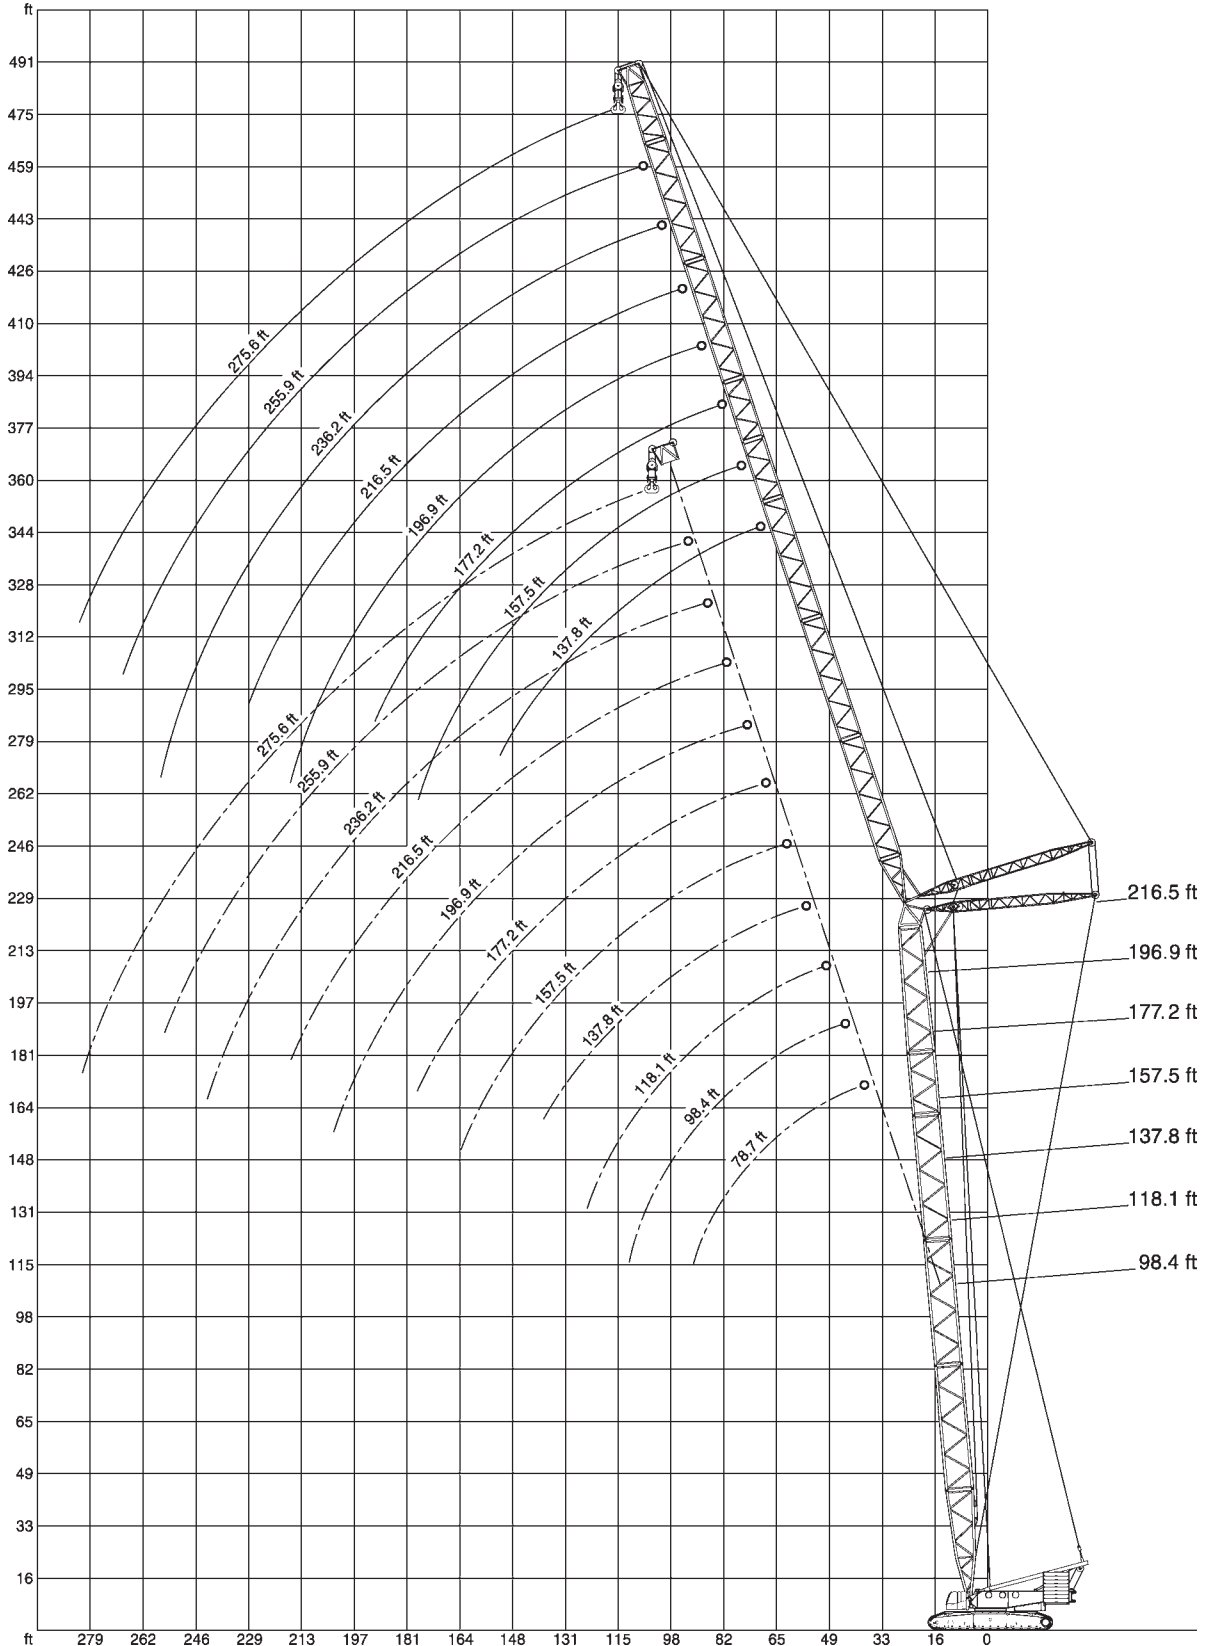

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information


98.4 ft
SW 85°


78.7-275.6 ft


396,800 lbs


27'6"


360°

75
75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

	98.4											
ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	ft
45.9	458.6											45.9
52.5	379.2	377										52.5
59.1	319.7	317.5	317.5									59.1
65.6	277.8	275.6	273.4	271.2								65.6
72.2	244.7	242.5	240.3	238.1	235.9							72.2
78.7	217.2	216.1	213.8	211.6	210.5	207.2						78.7
85.3	196.2	194	192.9	189.6	188.5	186.3	184.1					85.3
91.9	177.5	176.4	174.2	172	170.9	167.6	166.4	165.3				91.9
98.4		160.9	158.7	156.5	155.4	153.2	151	149.9	147.7			98.4
111.5		136.7	134.5	132.3	131.2	129	126.8	125.7	123.5	122.4	120.2	111.5
124.7			115.7	113.5	112.4	110.2	108.9	107.4	104.7	104.3	102.3	124.7
131.2				106.7	105.3	103	101.5	100.1	97.4	97	94.9	131.2
137.8				99.9	98.1	95.7	94.1	92.8	90.2	89.7	87.5	137.8
144.4					92.3	89.8	88.3	86.9	84.3	83.8	81.7	144.4
150.9					86.4	84	82.5	80.9	78.5	77.8	75.8	150.9
164					76.9	74.3	72.8	71.2	68.8	68.1	66.1	164
177.2						66.4	64.6	63.3	60.6	60	58	177.2
190.3							58	56.4	53.8	53.1	50.7	190.3
203.4							52	50.5	47.6	47	44.5	203.4
216.5								45.4	42.3	41.4	39	216.5
229.7									37.7	36.6	34.4	229.7
242.8									33.7	32.6	30.2	242.8
255.9										29.1	26.5	255.9
262.5											24.9	262.5
275.6											21.9	275.6
282.2											20.5	282.2

with 132,300 lbs central ballast

All information given are for reference only.



118.1 ft
SW 85°



78.7-275.6 ft



396,800 lbs



27'6"



360°

75
75%

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	78.7	98.4	118.1	137.8	157.5	118.1 177.2	196.9	216.5	236.2	255.9	275.6	ft
52.5	374.8											52.5
59.1	317.5	315.3	315.3									59.1
65.6	275.6	273.4	271.2	269								65.6
72.2	242.5	240.3	238.1	235.9	233.7							72.2
78.7	216.1	213.8	212.7	210.5	208.3	206.1						78.7
85.3	194	192.9	190.7	188.5	187.4	184.1	183					85.3
91.9	176.4	174.2	173.1	170.9	168.7	166.4	165.3	163.1				91.9
98.4		159.8	157.6	155.4	154.3	151	149.9	148.8	145.5			98.4
111.5		134.5	133.4	131.2	130.1	126.8	125.7	124.6	121.3	121.3	119	111.5
124.7			114.6	112.4	111.3	109.1	107.6	106	103.6	103	101	124.7
137.8				98.8	97.2	94.6	93	91.7	89.1	88.6	86.4	137.8
150.9				87.1	85.5	82.9	81.4	80	77.4	76.7	74.7	150.9
164					75.8	73.4	71.9	70.3	67.7	67.2	65	164
177.2						65.5	63.7	62.2	59.7	59.1	57.1	177.2
190.3						58.9	57.1	55.6	52.9	52	49.8	190.3
203.4							51.4	49.6	46.7	45.9	43.4	203.4
216.5								44.5	41.4	40.6	38.1	216.5
229.7									36.8	35.7	33.3	229.7
242.8									32.8	31.7	29.3	242.8
255.9										28.2	25.6	255.9
262.5											24	262.5
269											22.5	269
275.6											21.1	275.6
282.2											19.6	282.2

with 132,300 lbs central ballast

All information given are for reference only.

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information



75
75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

	137.8											
ft	78.7	98.4	118.1	137.8	157.5	177.2	196.9	216.5	236.2	255.9	275.6	ft
52.5	372.6											52.5
59.1	315.3	313.1										59.1
65.6	273.4	271.2	269									65.6
72.2	240.3	238.1	235.9	233.7								72.2
78.7	213.8	212.7	210.5	208.3	206.1	203.9						78.7
85.3	192.9	190.7	189.6	186.3	185.2	183	180.8					85.3
91.9	174.2	173.1	170.9	168.7	167.6	164.2	163.1	162				91.9
98.4		157.6	156.5	154.3	152.1	149.9	147.7	146.6	144.4			98.4
111.5		133.4	132.3	130.1	127.9	125.7	124.6	122.4	120.2	119	116.8	111.5
124.7			113.5	111.3	110.2	107.8	106.3	104.7	102.3	101.6	99.6	124.7
137.8				97.4	95.9	93.5	91.9	90.4	87.7	87.3	85.1	137.8
150.9				86	84.4	81.8	80.2	78.7	76.3	75.6	73.6	150.9
164					75	72.3	70.8	69.2	66.6	66.1	63.9	164
177.2						64.4	62.8	61.3	58.6	58	55.8	177.2
190.3						57.8	56	54.5	51.8	50.9	48.5	190.3
203.4							50.3	48.7	45.6	44.8	42.3	203.4
216.5								43.4	40.3	39.5	37	216.5
229.7								39	35.7	34.8	32.4	229.7
242.8									31.7	30.6	28.2	242.8
249.3										28.9	26.5	249.3
255.9										27.1	24.7	255.9
269											21.6	269
282.2											18.7	282.2

with 132,300 lbs central ballast

All information given are for reference only.



157.5 ft
SW 85°



78.7-275.6 ft



396,800 lbs



27'6"



360°

75

75%

ft	78.7	98.4	118.1	137.8	157.5	157.5	177.2	196.9	216.5	236.2	255.9	275.6	ft
52.5	370.4												52.5
59.1	313.1	310.9											59.1
65.6	271.2	269	266.8										65.6
72.2	238.1	235.9	233.7	231.5									72.2
78.7	212.7	210.5	208.3	206.1	203.9								78.7
85.3	190.7	188.5	187.4	185.2	183	180.8							85.3
91.9	173.1	170.9	169.8	167.6	165.3	163.1	160.9						91.9
98.4	157.6	156.5	154.3	152.1	151	147.7	146.6	144.4					98.4
111.5		132.3	131.2	127.9	126.8	124.6	122.4	121.3	117.9	117.9	115.7	111.5	111.5
124.7			112.4	110.2	108.9	106.5	104.9	103.4	100.8	100.3	98.1	124.7	124.7
137.8				96.3	94.6	92.2	90.6	89.1	86.4	86	83.8	137.8	137.8
150.9				84.9	83.1	80.7	79.1	77.6	75	74.5	72.3	150.9	150.9
157.5					78.4	75.9	74.4	72.9	70.2	69.8	67.6	157.5	157.5
164					73.6	71.2	69.7	68.1	65.5	65	62.8	164	164
177.2						63.3	61.7	60.2	57.5	56.9	54.5	177.2	177.2
190.3						56.9	55.1	53.6	50.5	49.8	47.4	190.3	190.3
203.4							49.4	47.4	44.5	43.7	41.2	203.4	203.4
216.5								42.3	39.2	38.4	35.9	216.5	216.5
229.7								37.9	34.6	33.7	31.3	229.7	229.7
242.8									30.9	29.8	27.3	242.8	242.8
255.9										26.2	23.8	255.9	255.9
269											23.1	20.5	269
275.6												19.2	275.6
282.2												17.9	282.2

with 132,300 lbs central ballast

All information given are for reference only.

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information


177.2 ft
SW 85°


78.7-275.6 ft


396,800 lbs


27'6"


360°

75
75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	177.2											ft
ft	78.7*	98.4*	118.1*	137.8*	157.5	177.2*	196.9*	216.5*	236.2*	255.9*	275.6*	ft
52.5	366											52.5
59.1	310.9	308.6										59.1
65.6	269	266.8	264.6									65.6
72.2	235.9	233.7	231.5	229.3								72.2
78.7	210.5	208.3	206.1	203.9	201.7							78.7
85.3	188.5	187.4	185.2	183	180.8	178.6						85.3
91.9	170.9	169.8	167.6	165.3	163.1	160.9	159.8					91.9
98.4	156.5	154.3	153.2	149.9	148.8	146.6	144.4	143.3				98.4
111.5		131.2	129	126.8	124.6	122.4	121.3	119	116.8	115.7		111.5
124.7			111.3	109.1	107.6	104.9	103.4	101.9	99.2	98.8	96.6	124.7
137.8			97.2	94.8	93.3	90.8	89.3	87.7	85.1	84.7	82.5	137.8
150.9				83.6	82	79.4	77.8	76.3	73.6	73.2	71	150.9
164					72.5	70.1	68.6	67	64.4	63.7	61.5	164
177.2						62.2	60.6	59.1	56.2	55.6	53.1	177.2
183.7						59	57.3	55.7	52.7	52	49.6	183.7
190.3						55.8	54	52.2	49.2	48.5	46.1	190.3
203.4							48.3	46.3	43.2	42.5	40.1	203.4
216.5								41.2	37.9	37.3	34.8	216.5
229.7								36.8	33.5	32.6	30.2	229.7
242.8									29.8	28.7	26.2	242.8
249.3										26.9	24.5	249.3
255.9										25.1	22.7	255.9
262.5										23.7	21.2	262.5
269										22.3	19.6	269
275.6											18.3	275.6
282.2											17	282.2

with 132,300 lbs central ballast
* idler wheel supported

All information given are for reference only.


 196.9 ft
 SW 85°


78.7-275.6 ft



396,800 lbs



27'6"



360°

75
 75%

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	78.7**	98.4**	118.1**	137.8**	157.5*	196.9	177.2*	196.9**	216.5**	236.2**	255.9**	275.6**	ft
59.1	306.4												59.1
65.6	264.6	262.4	260.1										65.6
72.2	233.7	231.5	229.3	227.1									72.2
78.7	208.3	206.1	203.9	201.7	199.5								78.7
85.3	186.3	185.2	183	180.8	178.6	176.4							85.3
91.9	168.7	167.6	165.3	163.1	160.9	158.7	157.6						91.9
98.4	154.3	152.1	151	148.8	146.6	144.4	142.2	141.1					98.4
111.5		129	127.9	124.6	123.5	120.2	119	117.9	114.6	110.2			111.5
124.7			109.8	107.4	105.8	103.4	101.9	100.3	97.4	97	94.8		124.7
137.8			95.9	93.5	91.9	89.3	87.7	86.2	83.6	83.1	80.9		137.8
150.9				82.2	80.5	78	76.5	75	72.3	71.9	69.7		150.9
164					71.2	68.8	67.2	65.7	63.1	62.4	60		164
170.6					67.5	64.9	63.4	61.7	59	58.3	55.9		170.6
177.2					63.7	61.1	59.5	57.8	54.9	54.2	51.8		177.2
190.3						54.5	52.9	50.9	47.8	47.2	44.8		190.3
203.4							47	45	41.9	41.2	38.8		203.4
216.5								39.9	36.8	36.2	33.5		216.5
229.7								35.5	32.4	31.5	29.1		229.7
242.8									28.4	27.6	25.1		242.8
249.3										25.9	23.4		249.3
255.9											24.3	21.6	255.9
262.5											22.7	20.1	262.5
269											21.2	18.5	269
282.2												15.9	282.2

with 132,300 lbs central ballast

* idler wheel supported

** with additional side jack


All information given are for reference only.

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information
Hydraulic Truck Cranes
Crawler Cranes
Carry Decks
Rough Terrain Cranes
Rigging Equipment
Aerial Lifts
Transportation



75
75%


ft	216.5											ft
	78.7**	98.4**	118.1**	137.8**	157.5**	177.2**	196.9**	216.5**	236.2**	255.9**	275.6**	
59.1	299.8											59.1
65.6	262.4	260.1										65.6
72.2	231.5	229.3	227.1									72.2
78.7	205	202.8	201.7	198.4								78.7
85.3	184.1	183	180.8	178.6	176.4							85.3
91.9	167.6	165.3	163.1	160.9	158.7	156.5	145.5					91.9
98.4	152.1	151	148.8	146.6	144.4	142.2	140	127.9				98.4
111.5		126.8	125.7	123.5	121.3	119	116.8	115.7	112.4	97		111.5
124.7			108.2	105.8	104.3	101.6	100.3	98.5	95.9	95.2	86	124.7
137.8			94.4	91.9	90.4	87.7	86.4	84.7	82	81.6	79.4	137.8
150.9				80.7	79.1	76.5	75.2	73.4	70.8	70.3	68.1	150.9
164					70.1	67.5	65.9	64.4	61.5	60.8	58.4	164
177.2					62.4	59.7	58.2	56.4	53.4	52.7	50.3	177.2
190.3						53.4	51.6	49.6	46.5	45.9	43.4	190.3
203.4							45.6	43.7	40.6	39.9	37.5	203.4
216.5							40.8	38.6	35.5	34.8	32.4	216.5
229.7								34.4	31.1	30.4	27.8	229.7
242.8									27.3	26.5	24	242.8
249.3									25.7	24.8	22.3	249.3
255.9									24	23.1	20.5	255.9
269										20.1	17.4	269
282.2											14.8	282.2

with 132,300 lbs central ballast

** with additional side jack

All information given are for reference only.

All information given are for reference only.

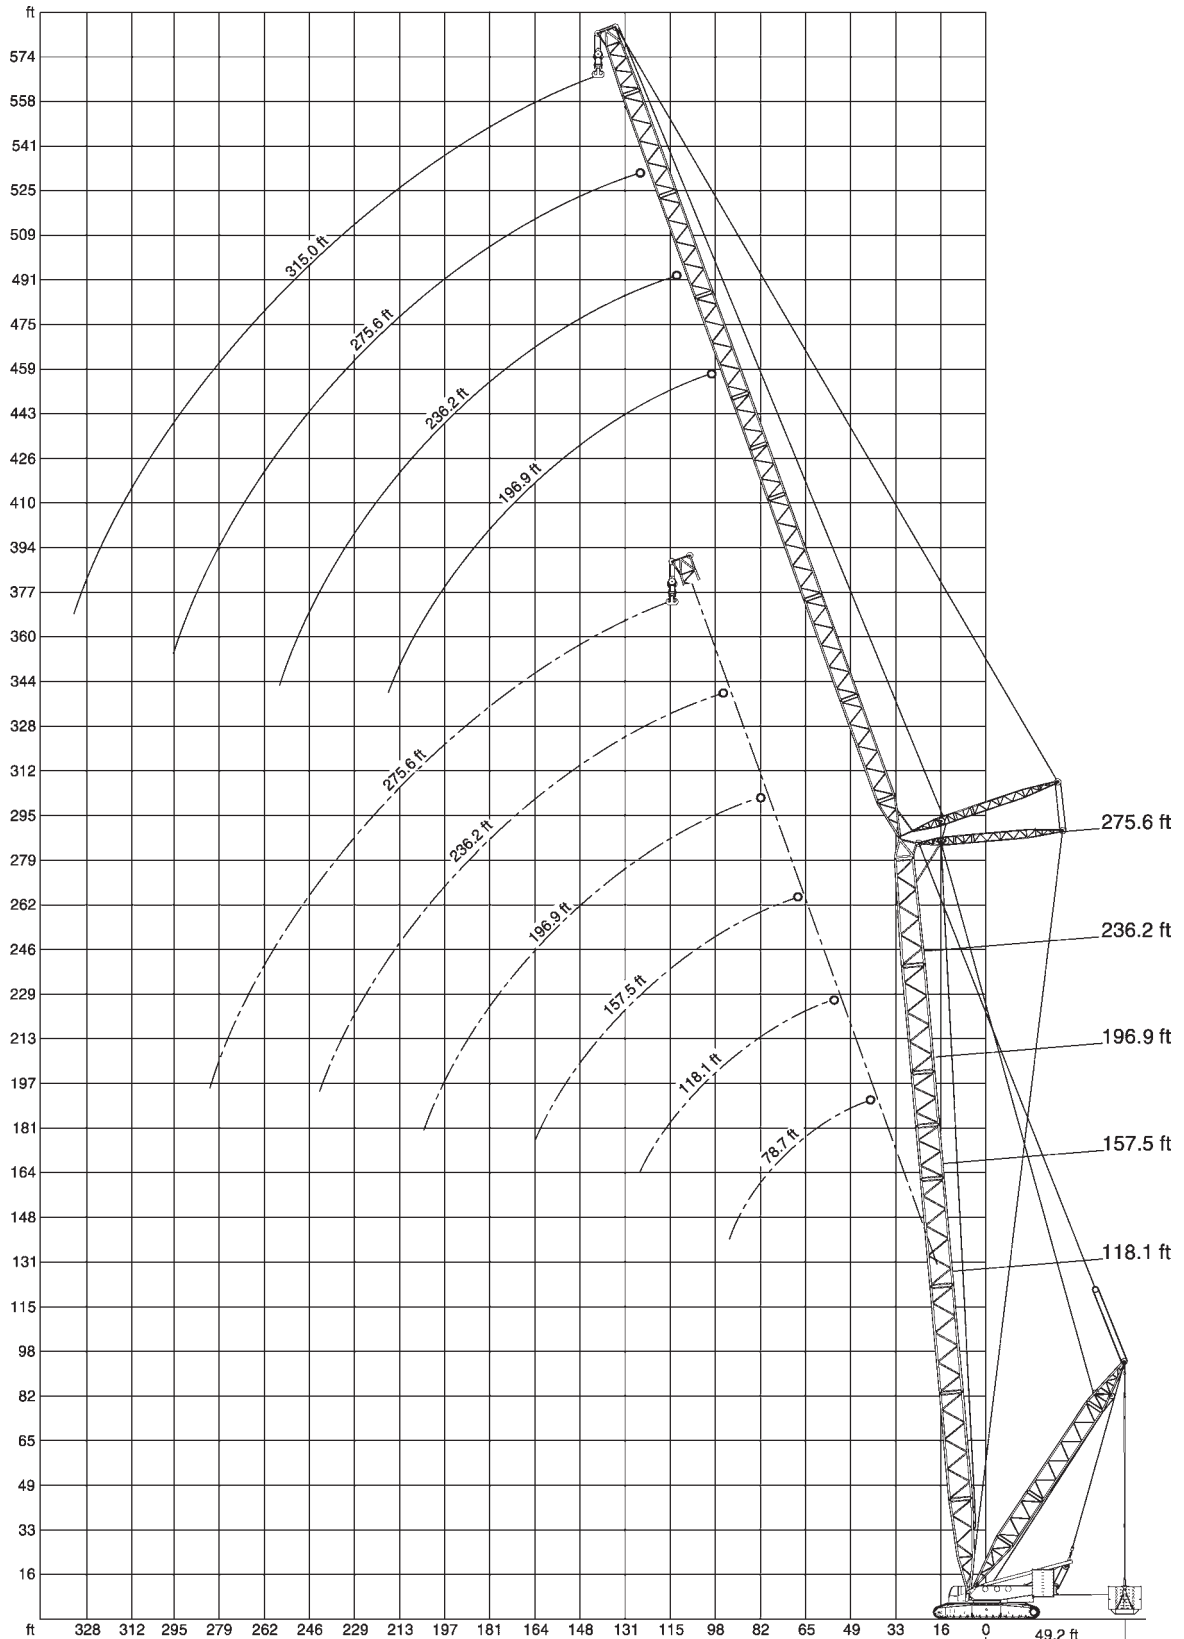

General Information

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts



Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

 118.1-157.5 ft
 98.4 ft
 78.7-275.6 ft
 352,700 lbs
 0-551,300 lbs
 27'6"
 360°
 **75**
 SWSL 85° 36.1-49.2 ft 75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	118.1						157.5						ft
	78.7	118.1	157.5	196.9	236.2	275.6	78.7	118.1	157.5	196.9	236.2	275.6	
52.5	661.4						654.8						52.5
59.1	661.4	566.6					654.8						59.1
65.6	661.4	566.6					646	491.6					65.6
72.2	634.9	557.8	412.3				617.3	482.8					72.2
78.7	546.7	526.9	412.3				584.2	467.4	357.1				78.7
85.3	471.8	498.2	412.3	295.4			504.9	447.5	357.1				85.3
91.9	401.2	458.6	396.8	295.4			432.1	427.7	352.7	264.6			91.9
98.4		412.3	379.2	295.4	211.6		357.1	407.9	346.1	264.6			98.4
111.5		335.1	343.9	282.2	211.6	152.1		350.5	328.5	257.9	191.8	141.1	111.5
124.7		271.2	299.8	262.4	207.2	152.1		284.4	299.8	246.9	189.6	141.1	124.7
137.8			255.7	242.5	200.6	149.9			264.6	233.7	183	138.9	137.8
150.9			219.4	220.5	191.8	149.9			224.9	216.1	176.4	136.7	150.9
164			185.2	198.4	183	147.7			190.7	200.6	169.8	134.5	164
177.2				173.1	174.2	145.5				177.5	163.1	132.3	177.2
190.3				151	158.7	143.3				154.3	156.5	132.3	190.3
203.4				129	141.1	138.9				132.3	143.3	130.1	203.4
216.5					124.6	130.1					126.8	127.9	216.5
229.7					109.8	116.8					111.3	117.9	229.7
242.8					94.4	104.5					96.1	105.8	242.8
255.9						93						94.1	255.9
269						82						82.9	269
282.2						70.3						71.4	282.2

All information given are for reference only.

							75
196.9-236.2 ft SWSL 85°	98.4 ft	78.7-275.6 ft	352,700 lbs	0-551,300 lbs 36.1-49.2 ft	27'6"	360°	75%

ft	196.6						236.2						ft
	78.7	118.1	157.5	196.9	236.2	275.6	78.7	118.1	157.5	196.9	236.2	275.6	
59.1	544.5						407.9						59.1
65.6	524.7	399					407.9						65.6
72.2	502.7	399					385.8	306.4					72.2
78.7	480.6	388	297.6				370.4	302					78.7
85.3	454.2	377	297.6				357.1	295.4	233.7				85.3
91.9	425.5	363.8	297.6	224.9			346.1	286.6	233.7				91.9
98.4	401.2	352.7	291	224.9			335.1	277.8	231.5	180.8			98.4
111.5		328.5	277.8	222.7	169.8			262.4	222.7	178.6	138.9		111.5
124.7		302	262.4	216.1	167.6	125.7		246.9	213.8	174.2	138.9	105.8	124.7
137.8		240.3	249.1	209.4	163.1	125.7		235.9	202.8	167.6	134.5	105.8	137.8
150.9			235.9	200.6	158.7	123.5			194	160.9	132.3	103.6	150.9
164			201.7	189.6	154.3	121.3			185.2	156.5	127.9	101.4	164
177.2			165.3	180.8	149.9	119			176.4	152.1	123.5	101.4	177.2
190.3				160.9	145.5	116.8				145.5	119	99.2	190.3
203.4				138.9	138.9	114.6				141.1	116.8	97	203.4
216.5					131.2	112.4				122.4	112.4	94.8	216.5
229.7					115.7	108					105.8	92.6	229.7
242.8					101.2	105.8					99.2	88.2	242.8
255.9						97					89.5	86	255.9
269						86.4						83.8	269
282.2						75.4						77.2	282.2
295.3												66.6	295.3

All information given are for reference only.









General Information
Hydraulic Truck Cranes
Crawler Cranes
Carry Decks
Rough Terrain Cranes
Rigging Equipment
Aerial Lifts
Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

 275.6-354.3 ft
 98.4 ft
 118.1-315 ft
 352,700 lbs
 0-551,300 lbs
 27'6"
 360°
 **75**
 SWSL 85° 36.1-49.2 ft 75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	275.6					315					354.3		ft	
	118.1	157.5	196.9	236.2	275.6	118.1	157.5	196.9	236.2	275.6	315	157.5		196.9
78.7	231.5					178.6								78.7
85.3	224.9	179.7				178.6								85.3
91.9	218.3	179.7				170.9	133.4					97.4		91.9
98.4	211.6	174.2	141.1			165.3	133.4					97.4		98.4
111.5	200.6	167.6	141.1	108		154.3	125.7	101.2				92.8	74.3	111.5
124.7	191.8	158.7	136.7	108	88.2	144.4	119	97.2	77.8	60.2		88.2	71	124.7
137.8	183	152.1	130.1	105.8	88.2	136.7	112.4	92.8	75.2	60.2	42.8	83.6	67.7	137.8
150.9		145.5	125.7	103.6	86		107.1	88.4	72.3	57.5	42.8	78.7	64.4	150.9
164		141.1	121.3	99.2	83.8		101.9	84.2	69.2	55.1	41.9	74.7	61.1	164
177.2		134.5	114.6	97	81.6		96.6	79.8	65.9	52.9	39.7	71	57.8	177.2
190.3			110.2	92.6	79.4			76.3	62.6	50.7	39.7	67	54.9	190.3
203.4			105.8	90.4	77.2			72.8	59.5	48.5	37.5		52	203.4
216.5			101.4	86	75			68.8	57.3	46.3	35.3		49.2	216.5
229.7				83.8	72.8				55.1	46.3	35.3		44.5	229.7
242.8				81.6	70.5				52.9	44.1	33.1			242.8
255.9				79.4	68.3				50.7	41.9	33.1			255.9
269					63.9					39.7	30.9			269
282.2					61.7					37.5	28.7			282.2
295.3					59.5					37.5	28.7			295.3
308.4											26.5			308.4
321.5											24.3			321.5
334.6											24.3			334.6

All information given are for reference only.

							75
196.9-236.2 ft HSWSL 85°	98.4 ft	78.7-275.6 ft	352,700 lbs	0-551,300 lbs 36.1-49.2 ft	27'6"	360°	75%

All information given are for reference only.

ft	196.6						236.2						ft
	78.7	118.1	157.5	196.9	236.2	275.6	78.7	118.1	157.5	196.9	236.2	275.6	
55.8	599.7												55.8
59.1	588.6						478.4						59.1
65.6	566.6	432.1					471.8						65.6
72.2	540.1	425.5					451.9	359.4					72.2
78.7	515.9	414.5	319.7				434.3	350.5					78.7
85.3	487.2	403.4	317.5				414.5	339.5	271.2				85.3
91.9	451.9	390.2	310.9	240.3			399	330.7	264.6				91.9
98.4	403.4	377	304.2	238.1			381.4	319.7	260.1	206.1			98.4
111.5		350.5	288.8	229.3	173.1			299.8	249.1	199.5	154.3		111.5
124.7		302	271.2	219.4	167.6	126.8		280	235.9	192.9	151	115.7	124.7
137.8		240.3	253.5	205	162	124.6		257.9	224.9	185.2	146.6	112.4	137.8
150.9			231.5	190.7	156.5	122.4			212.7	176.4	142.2	111.3	150.9
164			201.7	176.4	149.9	120.2			200.6	168.7	136.7	108.9	164
177.2			165.3	165.3	143.3	116.8			176.4	159.8	132.3	106.3	177.2
190.3				154.3	136.7	114.6				148.8	126.8	103.6	190.3
203.4				138.9	130.1	111.3				140	121.3	101	203.4
216.5					123.5	108.9				122.4	115.7	98.3	216.5
229.7					115.7	104.5					111.3	95.5	229.7
242.8					101.2	100.1					105.4	92.4	242.8
255.9						95.7					89.5	89.3	255.9
269						86.4						86.4	269
282.2						75.4						78.5	282.2
295.3												66.6	295.3

General Information
Hydraulic Truck Cranes
Crawler Cranes
Carry Decks
Rough Terrain Cranes
Rigging Equipment
Aerial Lifts
Transportation

660 t Crawler Crane

TEREX-DEMAG CC 2800-1



General Information

							75
275.6-354.3 ft HSWSL 85°	98.4 ft	118.1-275.6 ft	352,700 lbs	0-551,300 lbs 36.1-49.2 ft	27'6"	360°	75%

Hydraulic Truck Cranes

Crawler Cranes

Carry Decks

Rough Terrain Cranes

Rigging Equipment

Aerial Lifts

Transportation

ft	275.6					315					354.3			ft
	118.1	157.5	196.9	236.2	275.6	118.1	157.5	196.9	236.2	275.6	118.1	157.5	196.9	
75.5	284.4													75.5
78.7	284.4					219.4								78.7
85.3	275.6	220.5				216.1					164.2			85.3
91.9	269	219.4				210.5	168.7				158.7	126.8		91.9
98.4	260.1	215	169.8			203.9	166.4				154.3	126.8		98.4
111.5	244.7	205	165.3	129		191.8	158.7	130.1			144.4	119	96.8	111.5
124.7	231.5	195.1	159.8	126.8	98.1	179.7	151	124.6	99.4	73.4	134.5	112.4	92.4	124.7
137.8	218.3	186.3	154.3	122.4	96.6	168.7	143.3	119	96.1	73.4	125.7	106.5	87.7	137.8
150.9		177.5	147.7	119	94.6		135.6	113.5	92.6	73.4	116.8	99.9	82.9	150.9
164		168.7	142.2	115.7	92.4		129	108.5	89.1	71		94.1	78.3	164
177.2		159.8	135.6	111.3	89.9		121.3	103.2	85.3	68.6		88.6	73.4	177.2
190.3			130.1	108	87.3			98.3	81.8	65.9		82.9	69.7	190.3
203.4			124.6	104.1	84.9			93.5	78.3	63.5			65.9	203.4
216.5			119	100.3	82.2			88.6	75	60.8			62.2	216.5
229.7				96.3	79.6				71.7	58.4			58.4	229.7
242.8				92.6	76.9				68.1	56				242.8
255.9				88.8	74.3				64.8	53.8				255.9
269					71.7					51.6				269
282.2					69					49.2				282.2
295.3					66.6					47				295.3

All information given are for reference only.